


accessory 3VJ9 IEC framesize 3VJ11 125 framesize 3VJ12 250A shunt trip
110VAC 50/60Hz

Model	
product designation	shunt
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
apparent power consumption / maximum	55 VA
Voltage	
control supply voltage (Us) / at AC	110 V AC 50/60Hz
Mechanical Design	
net weight	77 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other


[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9218-0ST35
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VJ9218-0ST35
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9218-0ST35

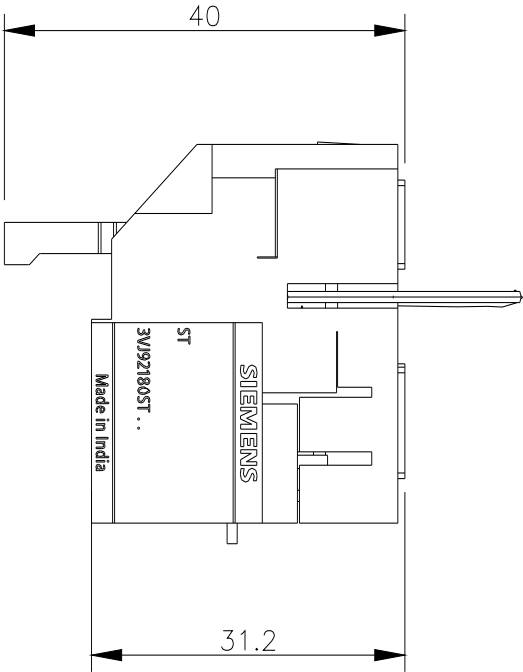

Side
View

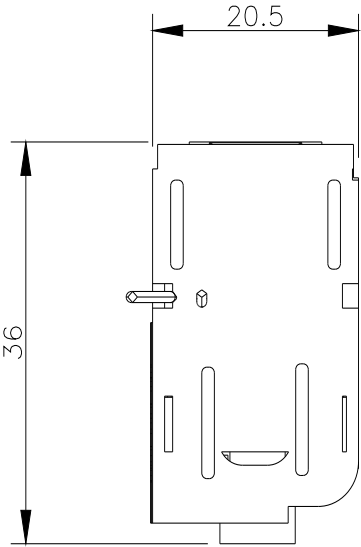

Front
View

last modified:

1/14/2021

