

accessory 3VJ9 IEC framesize 3VJ11 125 framesize 3VJ12 250A shunt trip
220VAC 50/60Hz


Model	
product designation	shunt
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
apparent power consumption / maximum	60 VA
Voltage	
control supply voltage (Us) / at AC	220 V AC 50/60Hz
Mechanical Design	
net weight	73 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)


[Confirmation](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9218-0ST36>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9218-0ST36>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9218-0ST36

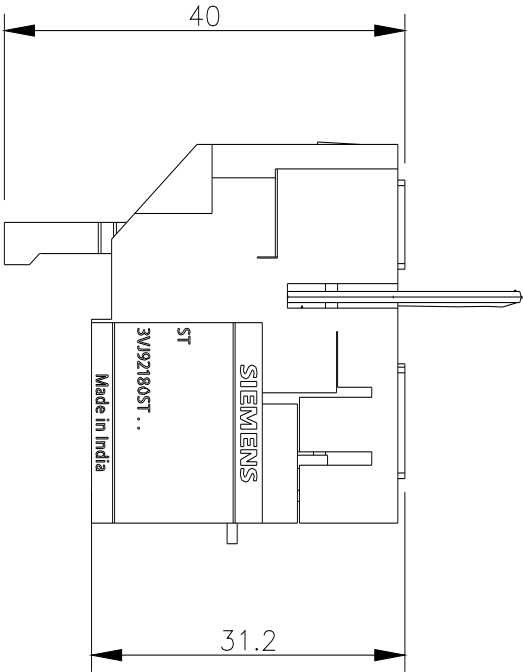

Side
View

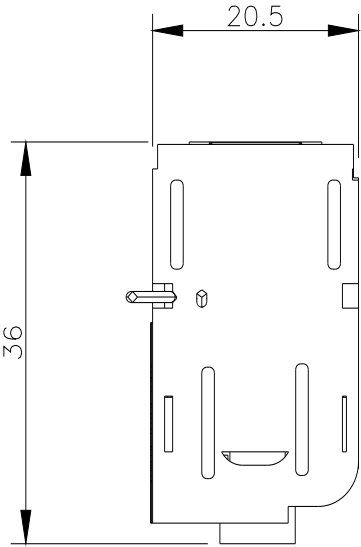

Front
View

last modified:

1/14/2021

