

bus connectors broadened front mounted; 4 units accessory for: 3VM10/11
extended pole-center distance for India

Model	
product brand name	SETRON
product designation	accessories
design of the product	front bus connectors broadened 4 units
accessories	Bus connector offset
General technical data	
designation / of the terminal	screw-type termination
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	2.5 mm ²
• for copper cable / stranded / maximum	70 mm ²
type of connectable conductor cross-sections / of the laminated conductor rails	
• maximum	1x30x8
tightening torque / when using copper cables	
• stranded	12
thickness / of the busbar	
• minimum	2 ... 8
• maximum	
width / of the busbar / maximum	30 mm
Certificates	
General Product Approval	Test Certificates



[Confirmation](#)



EG-Konf.

[Miscellaneous](#)



[Miscellaneous](#)

Marine / Shipping	other	Environment
	Miscellaneous	Confirmation
		Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9154-0QC50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VM9154-0QC50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9154-0QC50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

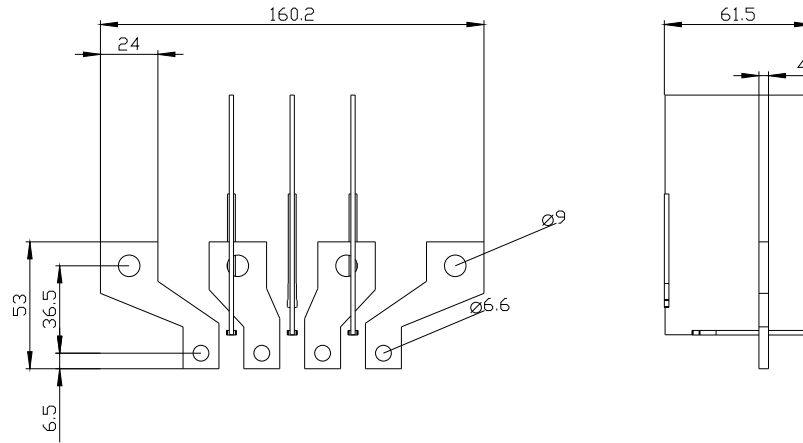

last modified:

8/19/2022 

