



bus connectors broadened front mounted; 4 units extended pole-center distance for India

Model	
product brand name	SETRON
product designation	accessories
design of the product	front bus connectors broadened 4 units
accessories	Bus connector offset
General technical data	
designation / of the terminal	screw-type termination
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	120 mm <sup>2</sup>
• for copper cable / stranded / maximum	370 mm <sup>2</sup>
type of connectable conductor cross-sections / of the laminated conductor rails	
• maximum	1x60x12.5
tightening torque / when using copper cables	
• stranded	30
thickness / of the busbar	
• minimum	5 ... 12.5
• maximum	
width / of the busbar / maximum	60 mm
Certificates	
General Product Approval	Marine / Shipping



[Confirmation](#)

[Miscellaneous](#)



other	Environment
<a href="#">Miscellaneous</a>	<a href="#">Confirmation</a>
	<a href="#">Environmental Confirmations</a>

Further information
Information on the packaging <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a> Information- and Downloadcenter (Catalogs, Brochures,...) <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a> Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9484-0QC50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VM9484-0QC50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VM9484-0QC50](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9484-0QC50)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

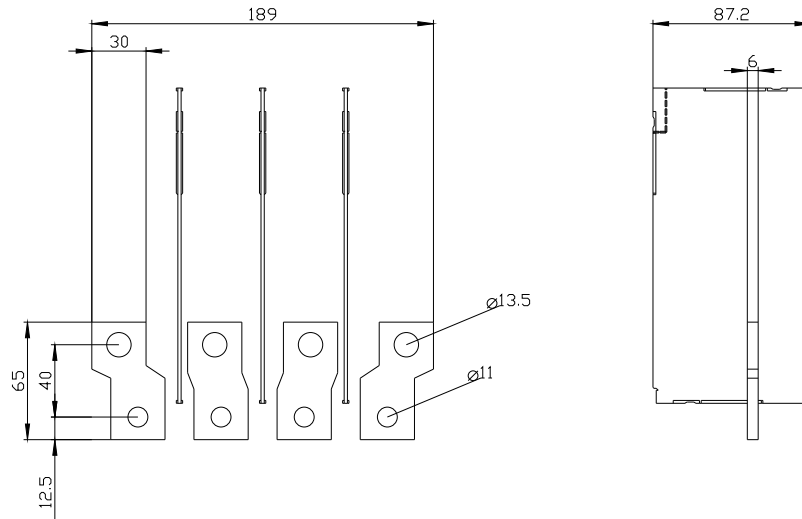

last modified:

8/19/2022 

