



Figure similar

MCB 3A 1-pole C characteristic 7.5 kA

| Model | |
|---|--|
| product brand name | SENTRON |
| product designation | Miniature circuit breaker |
| General technical data | |
| number of poles | 1 |
| design of pole | 1P |
| tripping characteristic class | C |
| mechanical service life (operating cycles) | |
| • at AC typical | 10 000 |
| overvoltage category | III |
| degree of pollution | 2 |
| Voltage | |
| type of voltage of the operating voltage | AC |
| type of voltage | Use only in alternating current or direct current circuits. Mixed use is not permitted. |
| insulation voltage (Ui) | |
| • with single-phase operation at AC rated value | 250 V |
| • with multi-phase operation at AC rated value | 440 V |
| operational current | |
| • at 30 °C rated value | 3 A |
| • at AC rated value | 3 A |
| Supply voltage | |
| value range of the supply voltage frequency | 50/60 Hz |
| operating voltage | |
| • with multi-phase operation at AC maximum | 440 V |
| • at DC rated value maximum | 62.5 V |
| • | The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V |
| value range of the supply voltage at AC | 240/415 V |
| Protection class | |
| protection class IP | IP20, with connected conductors |
| Breaking Capacity | |
| switching capacity current | |
| • according to EN 60898 rated value | 7.5 kA |
| energy limitation class | No |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1.16 W |
| suitability for operation | Residential buildings/infrastructure |
| Product details | |

| | |
|---|-----|
| product feature touch protection | Yes |
| product component neutral conductor switching | No |
| product feature | |
| • halogen-free | Yes |
| • sealable | Yes |
| • silicon-free | Yes |
| product extension installable supplementary devices | Yes |

Connections

| | |
|--|----------------------|
| connectable conductor cross-section solid | |
| • minimum | 0.75 mm ² |
| • maximum | 25 mm ² |
| connectable conductor cross-section stranded | |
| • minimum | 0.75 mm ² |
| • maximum | 25 mm ² |
| connectable conductor cross-section finely stranded with core end processing | |
| • minimum | 0.75 mm ² |
| • maximum | 25 mm ² |
| tightening torque with screw-type terminals | |
| • minimum | 2.5 N·m |
| • maximum | 3 N·m |

Mechanical Design

| | |
|-------------------------------|-------|
| height | 90 mm |
| width | 18 mm |
| depth | 76 mm |
| installation depth | 70 mm |
| number of modular width units | 1 |
| mounting position | any |
| net weight | 115 g |

Environmental conditions

| | |
|---|--------|
| vibration resistance according to IEC 60068-2-6 | no |
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 45 °C |
| ambient temperature during storage | |
| • minimum | -40 °C |
| • maximum | 75 °C |

Environmental footprint

| | |
|--|-----------|
| Environmental Product Declaration (EPD) | Yes |
| Global Warming Potential [CO2 eq] total | 28.2 kg |
| Global Warming Potential [CO2 eq] during manufacturing | 0.718 kg |
| Global Warming Potential [CO2 eq] during operation | 27.5 kg |
| Global Warming Potential [CO2 eq] after end of life | -0.057 kg |

Approvals Certificates

| | |
|--------------------------|-------|
| General Product Approval | other |
|--------------------------|-------|

[Confirmation](#)



[Confirmation](#)

[Miscellaneous](#)

Environment



[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL6103-7RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL6103-7RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6103-7RC

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

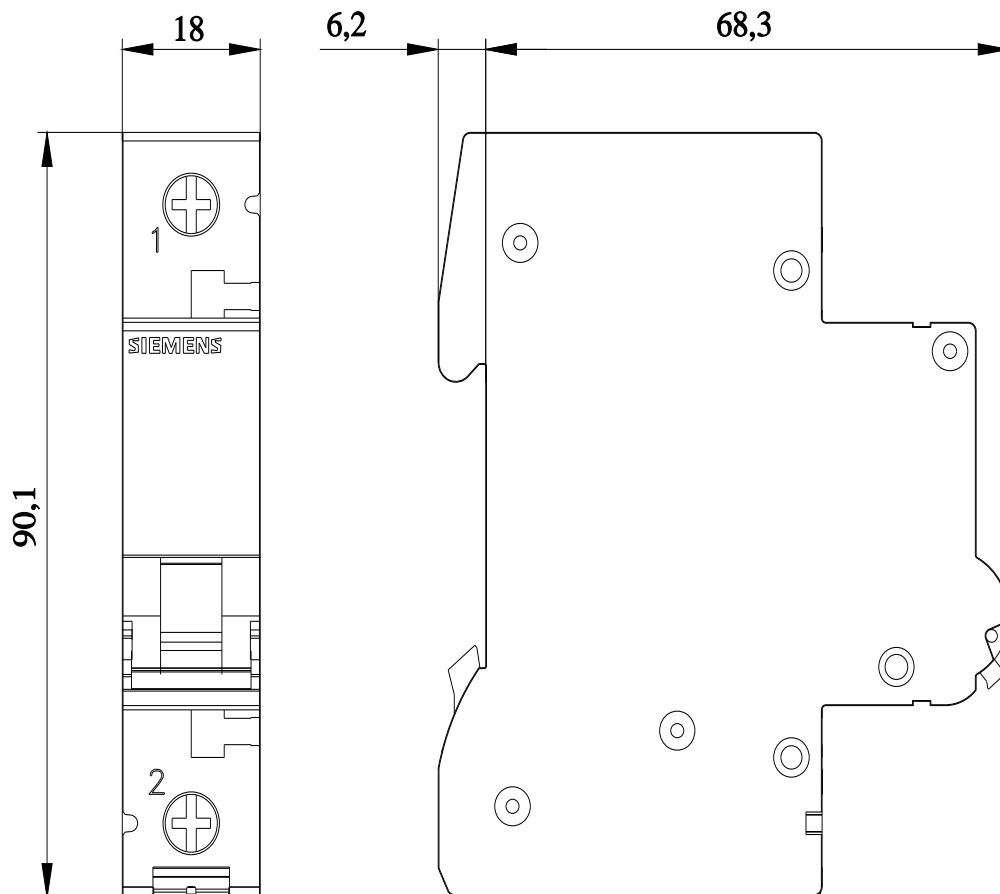



last modified:

8/6/2024 

