


Product datasheet

Specifications

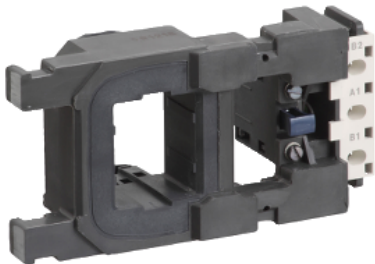

TeSys F - specific contactor coil - 220...230 V AC 40...400 Hz low consumption

LX9FH2202

To be discontinued on: 31 December 2028

To be discontinued

Main

Range	TeSys
Product or component type	Specific contactor coil
Device short name	LX9FH
Range compatibility	TeSys TeSys F LC1F contactor
Product compatibility	LC1F330 LC1F265
Control circuit type	AC at 40...400 Hz low consumption
[Uc] control circuit voltage	220...230 V AC 40...400 Hz
Average resistance	71.6 Ohm inrush at 20 °C 1621 Ohm holding at 20 °C
Operating time	25 ms opening 45 ms closing
Mechanical durability	10 Mcycles
Maximum operating rate	3600 cyc/h 55 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Operational: 0.85...1.1 Uc (at 55 °C) Drop-out: 0.35...0.55 Uc (at 55 °C)
Inrush power in VA	560...660 VA 40...400 Hz (at 20 °C)
Hold-in power consumption in VA	8...10 VA 40...400 Hz (at 20 °C)
Heat dissipation	8.4...10.4 W

Environment

Ambient air temperature for operation	-5...55 °C
Net weight	0.75 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	9.0 cm
Package 1 Width	10.0 cm
Package 1 Length	19.0 cm
Package 1 Weight	853.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	10.552 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)