# **Product datasheet**

Specification





# round pilot light Ø 22 yellow - integral LED - 220 V AC- screw clamp terminals

XA2EVM8LC

## Main

Range of product	Easy Harmony XA2	
Product or component type	Monolithic pilot light	
Device short name	XA2	
Mounting diameter	22.5 mm	
Shape of signaling unit head	Round	
Cap/operator or lens colour	Yellow	
Light source	LED	
Bulb base	Integral LED	
[Us] rated supply voltage	220230 V AC 50/60 Hz	

## Complementary

•		
Terminals description ISO n°1	(X1-X2)PL	
Device mounting	Fixing hole 22.3 +0.4/0 conforming to IEC 60947-5-1	
Fixing center	>= 30 x 40 mm (support panel) metal - thickness: 16 mm >= 30 x 40 mm (support panel) plastic - thickness: 26 mm	
Fixing mode	Fixing nut beneath head recommended torque: 2.2 N.m (+/- 0.2 N.m)	
marking	CE CCC	
[Us] rated supply voltage	voltage 220230 V	
Connections - terminals	Screw clamp terminals, $<= 2 \times 1.5 \text{ mm}^2$ with cable end conforming to IEC 60947-1 Screw clamp terminals, $1 \times 0.51 \times 2.5 \text{ mm}^2$ without cable end conforming to IEC 60947-1	
Shape of screw head	Cross compatible with Philips No 2 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver	
[Ui] rated insulation voltage	400 V (pollution degree 3) conforming to IEC 60947-1	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1	
Signalling type	Steady	
Supply voltage limits	0.81.2 V AC	
Current consumption	<= 20 mA	
Service life	40000 h at rated voltage and 25 °C	
Height	29 mm	
Width	29 mm	
Depth 53 mm		

Net weight 0.02 kg

## **Environment**

Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-2570 °C	
Overvoltage category	Class I conforming to IEC 536	
IP degree of protection	IP65 conforming to IEC 60529	
IK degree of protection	IK05	
Standards	GB 14048.1 IEC 60947-1 IEC 60947-5-1 GB 14048.5 IEC 60529 IEC 50102	
Product certifications	CCC CE	
Vibration resistance	ance 5 gn (f= 12500 Hz) conforming to IEC 60068-2-6	
Shock resistance	resistance 30 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.3 cm
Package 1 Width	2.9 cm
Package 1 Length	2.9 cm
Package 1 Weight	23.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	5.8 cm
Package 2 Width	6.4 cm
Package 2 Length	15.8 cm
Package 2 Weight	0.3 kg
Unit Type of Package 3	S02
Number of Units in Package 3	160
Package 3 Height	15.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	5.8 kg



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance

<b>Ø</b>	Reach Free Of Svhc	
<b>Ø</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


#### **Certifications & Standards**

Eu Rohs Directive	Compliant
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

## XA2EVM8LC

## **Dimensions Drawings**

#### **Dimensions**

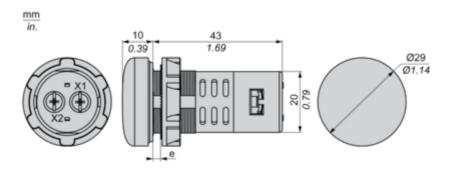

e: Calmping thickness:1 to 6 mm/0.04 to 0.24 in.


## **Product datasheet**

## XA2EVM8LC

## Mounting and Clearance

Panel Cut-Out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


## **Connection by Screw Clamp Terminals**

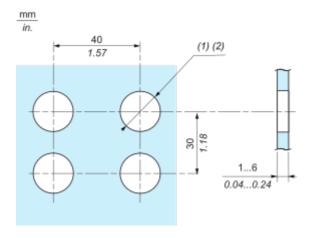

- (1) Diameter on finished panel or support
- (2) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

Connections and Schema

## Wiring Diagram



(1) LED