

Product datasheet

Specifications



Complete buzzer, plastic, Ø22,
continuous or intermittent tone,
110...120 V AC

XB5KSG

Main

Range Of Product	Harmony XB5
Product Or Component Type	Annunciator
Bezel Material	Dark grey plastic
Mounting Diamete	22 mm
Head Type	Standard
Cap/Operator Or Lens Colour	Black

Complementary

Supply Circuit Type	AC/DC
Supply Frequency	50/60 Hz
Signalling Type	Continuous or intermittent tone
Noise Level	90 dB 6.8 kHz 0.1 m +/- 10 %
Resistance To High Pressure Washer	9000000 Pa at 80 °C, distance : 0.1 m
Height	29 mm
Width	29 mm
Depth	55 mm
Net Weight	0.024 kg
Current Consumption	<= 20 mA
[Us] Rated Supply Voltage	120 V +/- 10 %

Environment

Protective Treatment	TH
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-40...70 °C
Overvoltage Category	Class II conforming to IEC 60536
Electrical Shock Protection Class	Class II conforming to IEC 60536
Nema Degree Of Protection	NEMA 13 NEMA 4X

Standards	IEC 60947-1 IEC 60947-5-1 UL 508 IEC 60947-5-4 IEC 60947-1 CSA C22.2 No 14 JIS C8201-5-1 IEC 60947-5-4 IEC 60947-5-1 JIS C8201-1 IEC 60529 IEC 62262 IEC 50102
------------------	--

Product Certifications	UL listed CSA BV
-------------------------------	------------------------

Packing Units

Unit Type Of Package 1	PCE
-------------------------------	-----

Number Of Units In Package 1	1
-------------------------------------	---

Package 1 Height	3.2 cm
-------------------------	--------

Package 1 Width	3.4 cm
------------------------	--------

Package 1 Length	5.8 cm
-------------------------	--------

Package 1 Weight	28.0 g
-------------------------	--------

Unit Type Of Package 2	S01
-------------------------------	-----

Number Of Units In Package 2	88
-------------------------------------	----

Package 2 Height	15.0 cm
-------------------------	---------

Package 2 Width	15.0 cm
------------------------	---------

Package 2 Length	40.0 cm
-------------------------	---------

Package 2 Weight	2.796 kg
-------------------------	----------

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Mercury Free

RoHS Exemption Information Yes

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu RoHS Directive Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation [China RoHS declaration](#)


Environmental Disclosure [Product Environmental Profile](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile No need of specific recycling operations

Dimensions Drawings

Dimensions

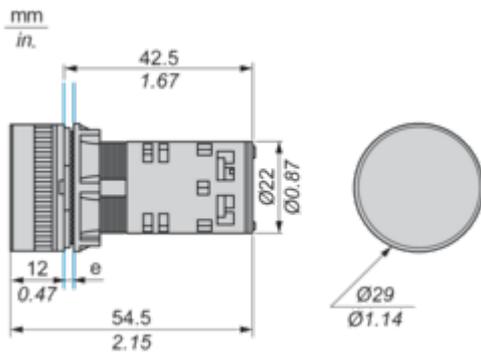


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Buzzer

Connection by Screw Clamp Terminals

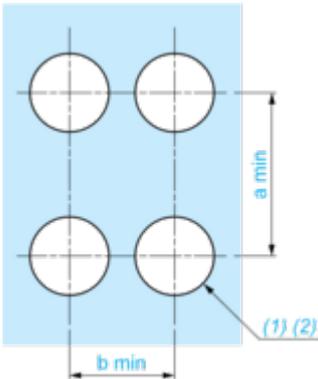


(1) Diameter on finished panel or support

(2) $\text{Ø}22.5 \text{ mm}$ recommended ($\text{Ø}22.3 \text{ }_0^{+0.4}$) / $\text{Ø}0.89 \text{ in.}$ recommended ($\text{Ø}0.88 \text{ in. }_0^{+0.016}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18

Connections and Schema

Cabling of Annunciators

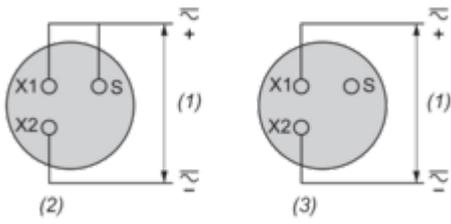

- (1) Supply
- (2) Intermittent
- (3) Continuous